

**EE-2200**

**Winter-99**

**Lecture 13**

**Z Transforms: Introduction**

**26-Feb-99**

**Info: Web-CT, Lab, HW**

- Quiz #2 on 1-March (Monday)
- Prob Set #6 due **TODAY**
  - Solutions for #6 will be posted ASAP
- Lab #8 on DTMF (Touch-Tone Phone)
  - **FORMAL** Report
  - Lab #9 is the last

**READING ASSIGNMENTS**

- This Lecture:
  - Chapter 7, pp. 202–216
- Other Reading:
  - Recitation: Ch. 7, pp. 217–220
    - CASCADING SYSTEMS
  - Next Lecture: Chapter 7, more

**LECTURE OBJECTIVES**

- **INTRODUCE** the Z–TRANSFORM
  - Give Mathematical Definition
  - Show how **H(z) POLYNOMIAL** simplifies analysis
    - **CONVOLUTION** EXAMPLE
- Z–Transform can be applied to
  - FIR Filter:  $h[n] \rightarrow H(z)$
  - Signals:  $x[n] \rightarrow X(z)$


$$H(z) = \sum_n h[n]z^{-n}$$

# TRANSFORM CONCEPT

- Move to a new domain where
  - OPERATIONS are EASIER/FAMILIAR
  - Use **POLYNOMIALS**
- TRANSFORM both ways
  - $x[n] \rightarrow X(z)$  (into the z domain)
  - $X(z) \rightarrow x[n]$  (back to the time domain)


# TRANSFORM EXAMPLE

- Equivalent Representations

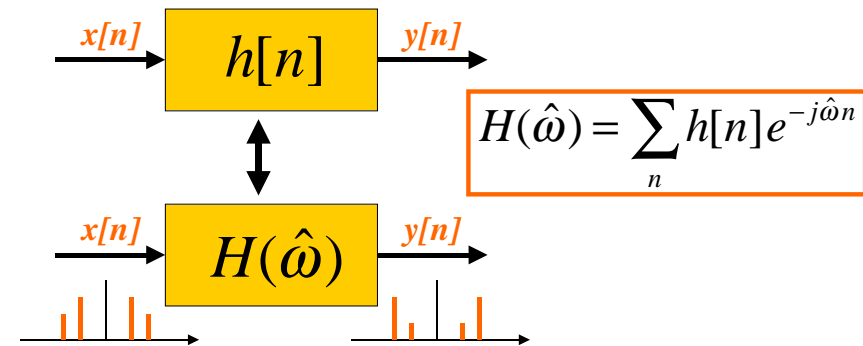

# Z-TRANSFORM IDEA

- POLYNOMIAL Representation

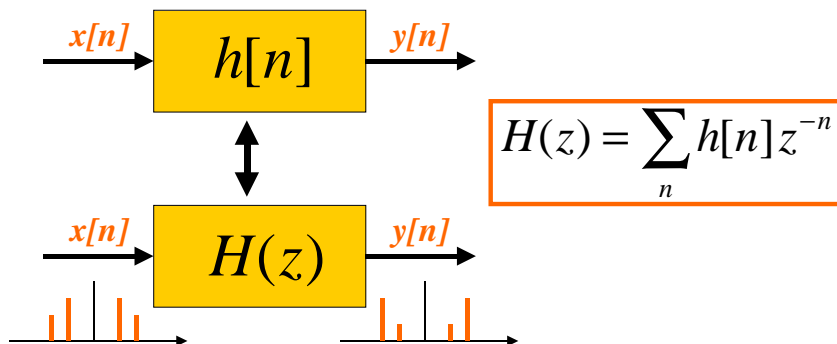

# Z-Transform DEFINITION

- POLYNOMIAL Representation

$$H(z) = \sum_n h[n] z^{-n}$$

- EXAMPLE:

APPLIES to Any SIGNAL

$$\{h[n]\} = \{2, 0, -3, 0, 2\}$$

$$H(z) = 2z^{-0} + 0z^{-1} - 3z^{-2} + 0z^{-3} + 2z^{-4}$$

$$= 2 - 3z^{-2} + 2z^{-4}$$

# Z-Transform POLYNOMIAL

$$x[n] = \sum_{k=0}^N x[k] \delta[n - k]$$

APPLIES to Any SIGNAL

$$X(z) = \sum_{k=0}^N x[k] z^{-k}$$

$$X(z) = \sum_{k=0}^N x[k] (z^{-1})^k$$

POLYNOMIAL in  $z^{-1}$

## Example 7.2

$$X(z) = 1 - 2z^{-1} + 3z^{-3} - z^{-5}$$

EXPONENT GIVES TIME LOCATION

$$x[n] = \begin{cases} 0 & n < 0 \\ 1 & n = 0 \\ -2 & n = 1 \\ 0 & n = 2 \\ 3 & n = 3 \\ 0 & n = 4 \\ -1 & n = 5 \\ 0 & n > 5 \end{cases}$$

$$x[n] = \delta[n] - 2\delta[n - 1] + 3\delta[n - 3] - \delta[n - 5]$$

# Z-Transform of FIR Filter

h[n] is same as {b<sub>k</sub>}

SYSTEM FUNCTION

$$H(z) = \sum_{k=0}^M b_k z^{-k} = \sum_{k=0}^M h[k] z^{-k}$$

$$y[n] = \sum_{k=0}^M b_k x[n - k] = \sum_{k=0}^M h[k] x[n - k]$$

FIR DIFFERENCE EQUATION

CONVOLUTION

# Z-Transform of FIR Filter

Get H(z) DIRECTLY from the {b<sub>k</sub>}

## Example 7.3



$$y[n] = 6x[n] - 5x[n - 1] + x[n - 2]$$

$$H(z) = 6 - 5z^{-1} + z^{-2} = (3 - z^{-1})(2 - z^{-1})$$

$$= 6 \frac{(z - \frac{1}{3})(z - \frac{1}{2})}{z^2}$$

## DELAY SYSTEM

### UNIT DELAY: find $h[n]$ and $H(z)$



## DELAY EXAMPLE

### UNIT DELAY: find $y[n]$ via polynomials

$x[n] = \{3, 1, 4, 1, 5, 9, 0, 0, 0, \dots\}$

$$Y(z) = z^{-1}X(z)$$

$$= z^{-1}(3 + z^{-1} + 4z^{-2} + z^{-3} + 5z^{-4} + 9z^{-5})$$

$$= 0z^0 + 3z^{-1} + z^{-2} + 4z^{-3} + z^{-4} + 5z^{-5} + 9z^{-6}$$

$n$	$n < 0$	0	1	2	3	4	5	6	$n > 6$
$y[n]$	0	0	3	1	4	1	5	9	0

## DELAY SYSTEM

### POLYNOMIAL MULTIPLICATION

$$Y(z) = z^{-1}X(z)$$

$$H(z) = z^{-1}$$

$$Y(z) = H(z)X(z) \leftarrow$$

## DELAY PROPERTY

*A delay of one sample multiplies the  $z$ -transform by  $z^{-1}$ .*

$$x[n-1] \iff z^{-1}X(z)$$

*Time delay of  $n_0$  samples multiplies the  $z$ -transform by  $z^{-n_0}$ .*

$$x[n-n_0] \iff z^{-n_0}X(z)$$

# GENERAL I/O PROBLEM

## How to combine $X(z)$ and $H(z)$ ?

### Consider Finite-Length Inputs $x[n]$

#### Example 7.5

$$x[n] = \delta[n - 1] - \delta[n - 2] + \delta[n - 3] - \delta[n - 4]$$

$$\text{and } h[n] = \delta[n] + 2\delta[n - 1] + 3\delta[n - 2] + 4\delta[n - 3]$$

$$X(z) = 0 + 1z^{-1} - 1z^{-2} + 1z^{-3} - 1z^{-4}$$

$$\text{and } H(z) = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3}$$

# FIR Filter = CONVOLUTION

$x[n], X(z)$	0	+1	-1	+1	-1		
$h[n], H(z)$	1	2	3	4			
-----							
	0	+1	-1	+1	-1		
		0	+2	-2	+2	-2	
			0	+3	-3	+3	-3
				0	+4	-4	+4
-----							
$y[n], Y(z)$	0	+1	+1	+2	+2	-3	+1
							-4

$$y[n] = \sum_{k=0}^M b_k x[n - k] = \sum_{k=0}^M h[k] x[n - k]$$

# CONVOLUTION PROPERTY

## PROOF:

$$y[n] = x[n] * h[n] = \sum_{k=0}^M h[k] x[n - k]$$

$$Y(z) = \sum_{k=0}^M h[k] (z^{-k} X(z))$$

MULTIPLY  
Z-TRANSFORMS

$$= \left( \sum_{k=0}^M h[k] z^{-k} \right) X(z) = H(z) X(z).$$

# CONVOLUTION EXAMPLE

## Finite-Length input $x[n]$

#### Example 7.5

$$x[n] = \delta[n - 1] - \delta[n - 2] + \delta[n - 3] - \delta[n - 4]$$

$$\text{and } h[n] = \delta[n] + 2\delta[n - 1] + 3\delta[n - 2] + 4\delta[n - 3]$$

$$X(z) = 0 + 1z^{-1} - 1z^{-2} + 1z^{-3} - 1z^{-4}$$

$$\text{and } H(z) = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3}$$

MULTIPLY  
Z-TRANSFORMS

# CONVOLUTION EXAMPLE

- Finite-Length input  $x[n]$
- FIR Filter ( $L=4$ )

MULTIPLY  
Z-TRANSFORMS

$$\begin{aligned}
 Y(z) &= H(z)X(z) \\
 &= (1 + 2z^{-1} + 3z^{-2} + 4z^{-3})(z^{-1} - z^{-2} + z^{-3} - z^{-4}) \\
 &= z^{-1} + (-1 + 2)z^{-2} + (1 - 2 + 3)z^{-3} + (-1 + 2 - 3 + 4)z^{-4} \\
 &\quad + (-2 + 3 - 4)z^{-5} + (-3 + 4)z^{-6} + (-4)z^{-7} \\
 &= z^{-1} + z^{-2} + 2z^{-3} + 2z^{-4} - 3z^{-5} + z^{-6} - 4z^{-7}
 \end{aligned}$$

$y[n] = ?$

# CASCADE SYSTEMS

- Does the order of  $S_1$  &  $S_2$  matter?
  - NO, LTI SYSTEMS can be rearranged !!!
  - WHAT ARE THE FILTER COEFFS?  $\{b_k\}$
  - WHAT is the FREQUENCY RESPONSE ?



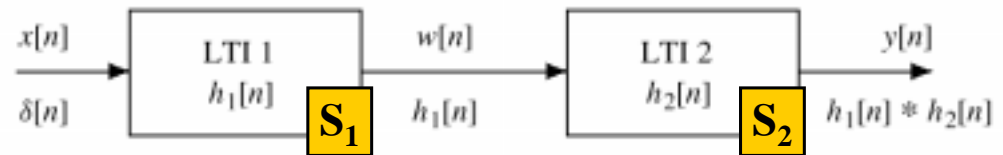


Figure 5.19 A Cascade of Two LTI Systems.

# CASCADE EQUIVALENT

- Multiply the System Functions



EQUIVALENT  
SYSTEM

$$H(z) = H_1(z)H_2(z)$$