

EE-2025

Fall-99

Lecture 4

Spectrum Representation

3-Sept-99

Web-CT Info

- **Bulletin Board has all OFFICIAL msgs**
- **Lectures are being posted**
 - **PDF format (4 per page)**
- **Upcoming Events:**
 - **Quiz #1 on 20-Sept (Monday)**
 - **On-Line Lab Quiz at start of Lab #3**

11/20/99

ECE-2025 Fall-99 rws/jMc

2

Homework & Lab Info

- **Prob Set #1 due TODAY**
 - **In Lecture, at the beginning**
- **HW #1 Solutions will be posted soon**
- **Lab #1 Report**
 - **Turn in during your lab time**
 - **EXCEPT for Monday & Tuesday sections**
 - **Turn in at Recitation time**
 - **Include INSTRUCTOR VERIFICATION**

11/20/99

ECE-2025 Fall-99 rws/jMc

3

Homework Formatting

- **Cover page with**
 - **Name**
 - **Lab section, ie, L05, L21, etc.**
 - **Recitation Prof's name**
 - **Lecture time**
- **Write on ONE side only**
- **STAPLE**

11/20/99

ECE-2025 Fall-99 rws/jMc

4

READING ASSIGNMENTS

■ This Lecture:

- Chapter 3, pp. 48–61

■ Other Reading:

- Appendix A: Complex Numbers
- Appendix B: MATLAB
- Next Lecture: Chapter 3

HISTORY

■ What company's first successful product was a sine-wave generator?


- Variable frequency
- Lab Instrument



LECTURE OBJECTIVES

■ Sinusoids with **DIFFERENT** Frequencies

- Add Sinusoids

$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$


■ **SPECTRUM** Representation

- **Graphical** Form shows Different Freqs

FREQUENCY DIAGRAM

■ Plot Complex Amplitude vs. Freq

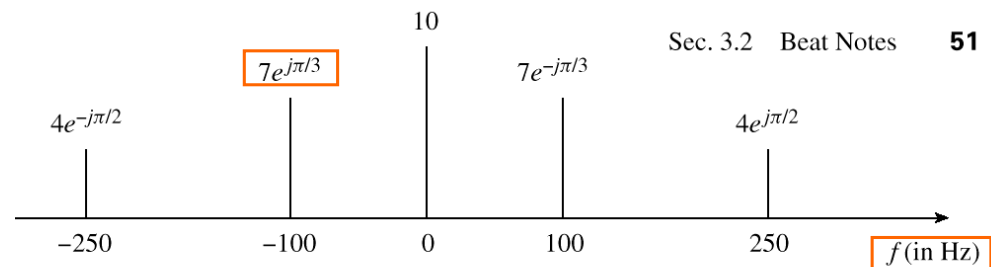


Figure 3.1 Spectrum of the signal $x(t) = 10 + 14 \cos(200\pi t - \pi/3) + 8 \cos(500\pi t + \pi/2)$. Positive and negative frequency components must be included even though the negative-frequency ones are the conjugate of the positive-frequency components.

Another FREQ. Diagram

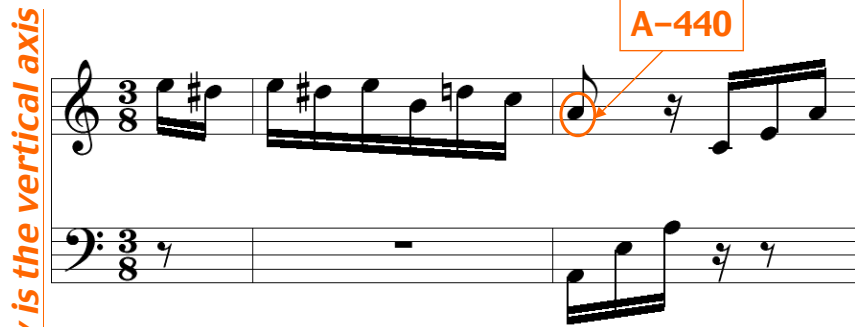


Figure 3.18 Sheet-music notation is a time–frequency diagram.

Time is the horizontal axis

MOTIVATION

■ Synthesize **Complicated** Signals

■ Musical Notes


- Piano uses 3 strings for many notes
- Chords: play several notes simultaneously

■ Human Speech

- Vowels have dominant frequencies
- Application: computer generated speech

■ Can **all** signals be generated this way?


Fur Elise WAVEFORM

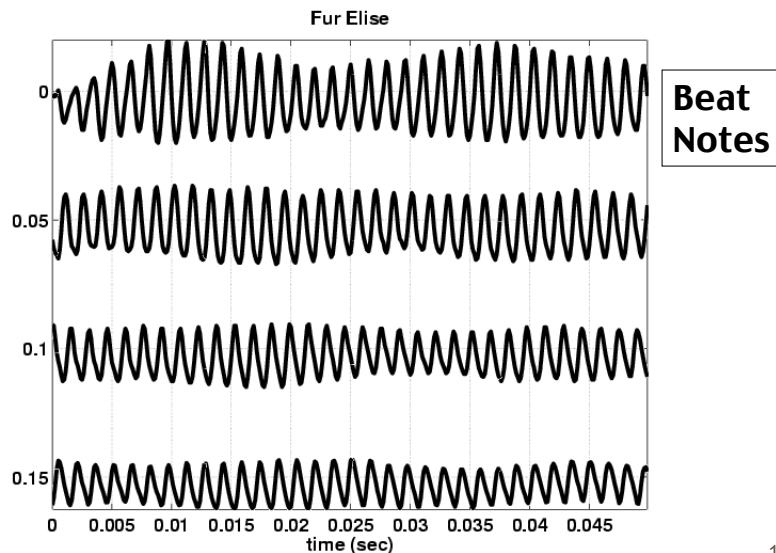

Speech Signal: BAT

■ Nearly Periodic in Vowel Region


- Period is (Approximately) $T = 0.0065$ sec

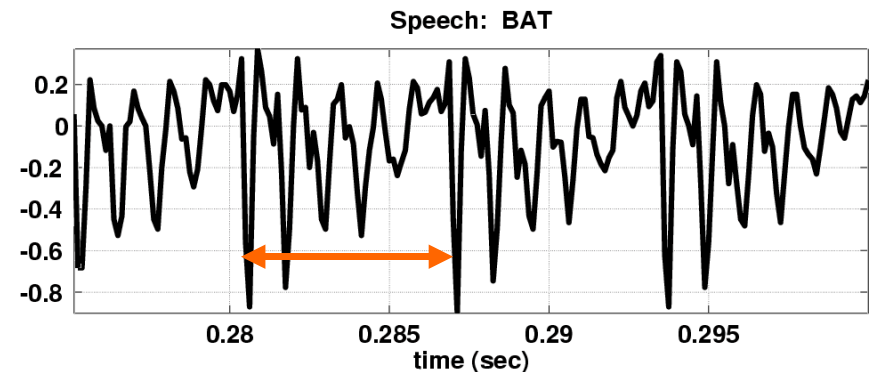

Euler's FORMULA

Complex Exponential

- Real part is cosine
- Imaginary part is sine
- Magnitude is one



$$e^{j\theta} = \cos(\theta) + j \sin(\theta)$$

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

INVERSE Euler's Formula

Solve for cosine (or sine)

$$e^{j\omega t} = \cos(\omega t) + j \sin(\omega t)$$

$$e^{-j\omega t} = \cos(-\omega t) + j \sin(-\omega t)$$

$$e^{-j\omega t} = \cos(\omega t) - j \sin(\omega t)$$

$$e^{j\omega t} + e^{-j\omega t} = 2 \cos(\omega t)$$

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

INVERSE Euler's Formula

Solve for cosine (or sine)

$$\cos(\omega t) = \frac{1}{2}(e^{j\omega t} + e^{-j\omega t})$$

$$\sin(\omega t) = \frac{1}{2j}(e^{j\omega t} - e^{-j\omega t})$$

SPECTRUM Interpretation

Cosine = sum of 2 complex exponentials:

$$A \cos(7t) = \frac{A}{2} e^{j7t} + \frac{A}{2} e^{-j7t}$$

- One has a positive frequency
- The other has **negative** freq.
- Amplitude of each is half as big

SPECTRUM of SINE

- Sine = sum of 2 complex exponentials:

$$A \sin(7t) = \frac{A}{2j} e^{j7t} - \frac{A}{2j} e^{-j7t}$$


$$= \frac{1}{2} A e^{-j0.5\pi} e^{j7t} + \frac{1}{2} A e^{j0.5\pi} e^{-j7t}$$

$$\frac{-1}{j} = j = e^{j0.5\pi}$$

- Positive freq. has phase = -0.5π
- Negative freq. has phase = $+0.5\pi$

GRAPHICAL SPECTRUM

EXAMPLE of SINE

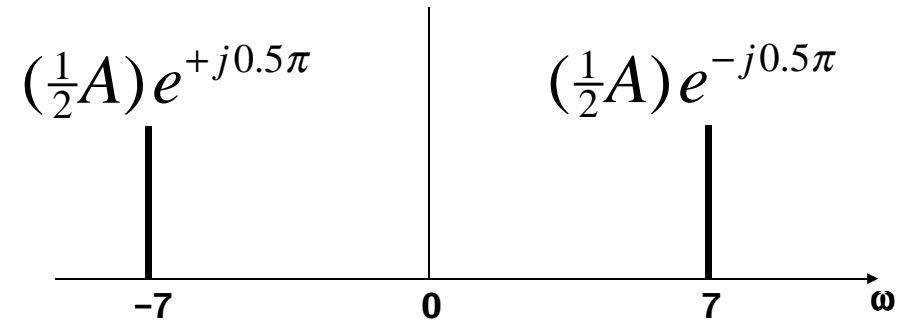


AMPLITUDE, PHASE & FREQUENCY are shown

NEGATIVE FREQUENCY

- Is negative frequency real?
- Doppler Radar provides an example
 - Police radar measures speed by using the Doppler shift principle
 - Let's assume 400Hz <----> 60 mph
 - **+400Hz** means towards the radar
 - **-400Hz** means away (opposite **direction**)
 - Think of a train whistle

SPECTRUM ---> SINUSOID

- Add the spectrum components:

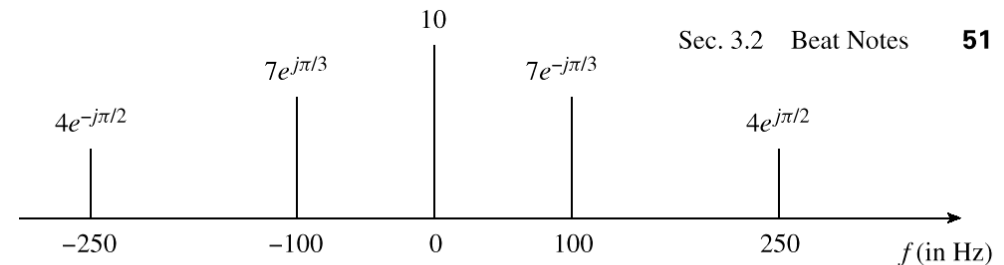

Sec. 3.2 Beat Notes 51

What is the formula for the signal x(t)?

Gather (A,ω,φ) information

Frequencies:

- -250 Hz
- -100 Hz
- 0 Hz
- 100 Hz
- 250 Hz

Amplitude & Phase

- 4 $-\pi/2$
- 7 $+\pi/3$
- 10 0
- 7 $-\pi/3$
- 4 $+\pi/2$

Note the conjugate phase

Zero freq always has zero phase (for real $x(t)$)

DC is another name for zero-freq component

Add Spectrum Components-1

Frequencies:


- -250 Hz
- -100 Hz
- 0 Hz
- 100 Hz
- 250 Hz

Amplitude & Phase

- 4 $-\pi/2$
- 7 $+\pi/3$
- 10 0
- 7 $-\pi/3$
- 4 $+\pi/2$

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Add Spectrum Components-2

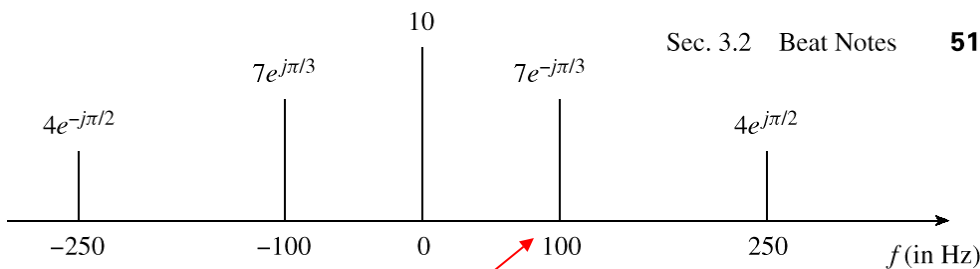

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Simplify Components

$$x(t) = 10 + 7e^{-j\pi/3}e^{j2\pi(100)t} + 7e^{j\pi/3}e^{-j2\pi(100)t} + 4e^{j\pi/2}e^{j2\pi(250)t} + 4e^{-j\pi/2}e^{-j2\pi(250)t}$$

Use Euler's Formula to get **REAL** sinusoids:

$$A \cos(\omega t + \varphi) = \frac{A}{2} e^{j\varphi} e^{j\omega t} + \frac{A}{2} e^{-j\varphi} e^{-j\omega t}$$

FINAL ANSWER

$$x(t) = 10 + 14 \cos(200\pi t - \pi/3) + 8 \cos(500\pi t + \pi/2)$$

So, we get the general form:

$$x(t) = \sum_{k=1}^N A_k \cos(2\pi f_k t + \varphi_k)$$



Summary: GENERAL FORM

$$x(t) = A_0 + \sum_{k=1}^N A_k \cos(2\pi f_k t + \phi_k)$$

$$x(t) = X_0 + \sum_{k=1}^N \Re\{X_k e^{j2\pi f_k t}\}$$

$$X_k = A_k e^{j\phi_k}$$

frequency is f_k .

$$\Re\{z\} = \frac{1}{2}z + \frac{1}{2}z^*$$

$$x(t) = X_0 + \sum_{k=1}^N \left\{ \frac{X_k}{2} e^{j2\pi f_k t} + \frac{X_k^*}{2} e^{-j2\pi f_k t} \right\}$$

Example: Synthetic Vowel


Sum of 5 Frequency Components

f_k (Hz)	X_k	Mag	Phase (rad)
200	$(771 + j12202)$	12,226	1.508
400	$(-8865 + j28048)$	29,416	1.876
500	$(48001 - j8995)$	48,836	-0.185
1600	$(1657 - j13520)$	13,621	-1.449
1700	$4723 + j0$	4723	0


Table 3.1: Complex amplitudes for harmonic signal that approximates the vowel sound "ah".

SPECTRUM of VOWEL

- Note: Spectrum has $0.5X_k$ (except X_{DC})
- Conjugates in negative frequency

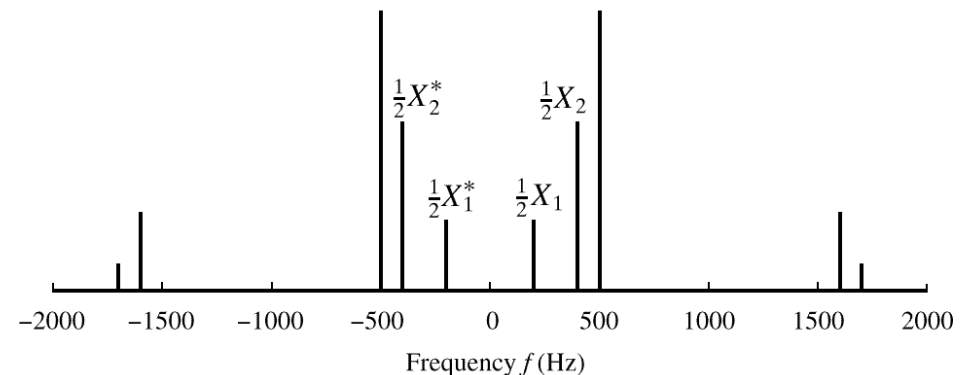

SPECTRUM of VOWEL (Polar Format)

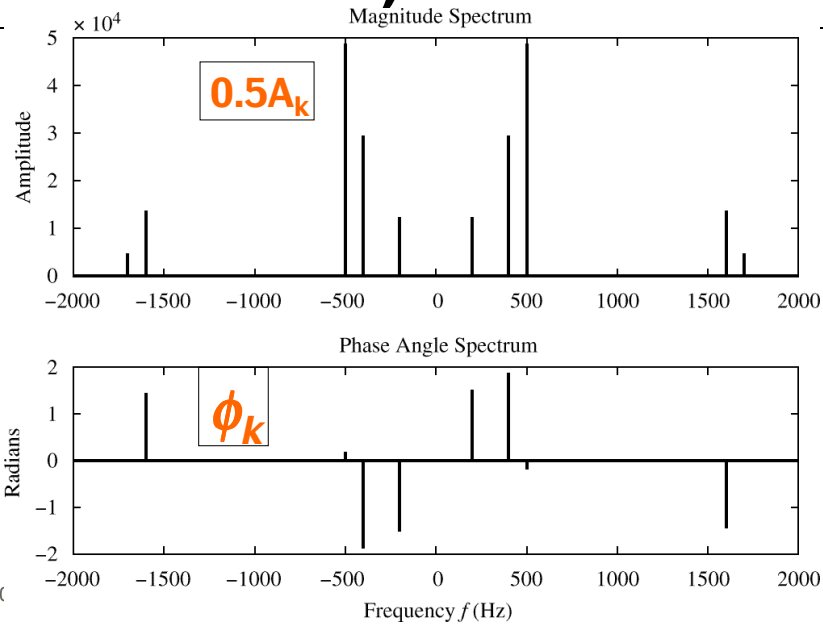

11/20

29

Vowel Waveform (sum of all 5 components)

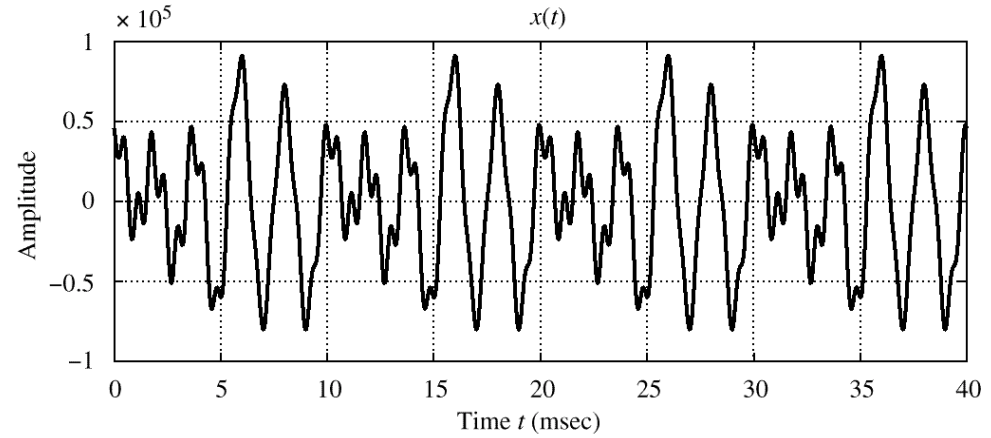


Figure 3.11 Sum of all of the terms in (3.3.4). Note that the period is 10 msec, which equals $1/f_0$.

11/20/99

ECE-2025 Fall-99 rws/jMc

30