

Lecture 9
FIR Filtering Intro
28-Sept-01

Information

- Music Listening is on-going
 - Have your song ready BEFORE lab
- **Honor Code and Lab Reports !!!**
- MATLAB help:
 - Mon @ 6pm, VL-456
 - Tues @ 11-12 in VL-361
- Problem Set #5 due NEXT WEEK

LAB IMAGES (TRUE)

- Getting **TRUE SIZE** comparisons is hard: use an image display program

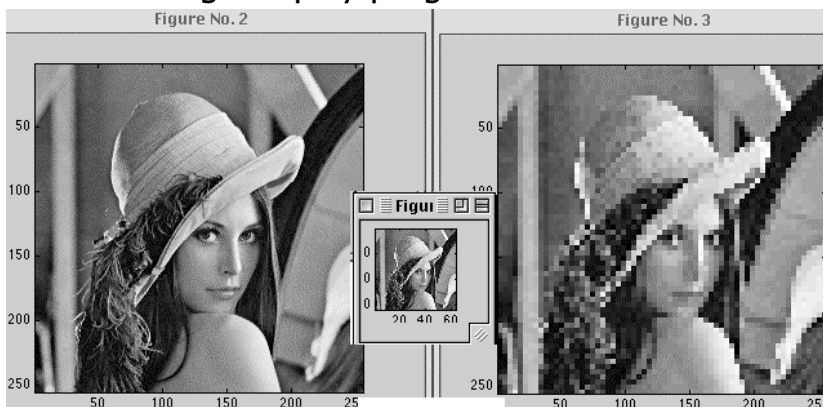


Image Display Procedure

- Example: 256 by 256 Lenna (512 is OK)
- Make MATLAB Figures in separate windows
- **ALT-PRINT-SCREEN** captures the active window (Win-95)
- Paste into "Paint" program
 - Under Win-95 **Accessories**
- Print after arranging images
- **IrfanView** is a Free program

Quiz Info

- All grading change on Quiz #1 must be completed by 1-Oct
 - After that, the scores are permanent
- Prepare for on-line Pre-Post-Labs
- Quiz #2 on 22-Oct (Monday)
 - Problem Sets #3, #4, #5, #6 and #7

9/27/2001

EE-2025 Fall-2001 jMc/rmm

LECTURE

5

Questions & Learning

- It is not the answer that enlightens, but the question.....Decouvertes
- No man really becomes a fool until he stops asking questions...C. Steinmetz

LECTURE

9/27/2001

EE-2025 Fall-2001 jMc/rmm

6

READING ASSIGNMENTS

- This Lecture:
 - Chapter 5, pp. 119-131
- Other Reading:
 - Recitation: Ch. 5, pp. 127-133, 142-146
 - CONVOLUTION
 - Next Lecture: Chapter 5, pp. 133-152

9/27/2001

EE-2025 Fall-2001 jMc/rmm

7

LECTURE OBJECTIVES

- INTRODUCE FILTERING IDEA
 - Weighted Average
 - Running Average
- FINITE IMPULSE RESPONSE FILTERS
 - **FIR** Filters
 - Show how to compute the output $y[n]$ from the input signal, $x[n]$

9/27/2001

EE-2025 Fall-2001 jMc/rmm


8

DIGITAL FILTERING



- CONCENTRATE on the COMPUTER
 - PROCESSING ALGORITHMS
 - SOFTWARE (MATLAB)
 - HARDWARE: DSP chips, VLSI
- DSP: DIGITAL SIGNAL PROCESSING

The TMS32010, 1983

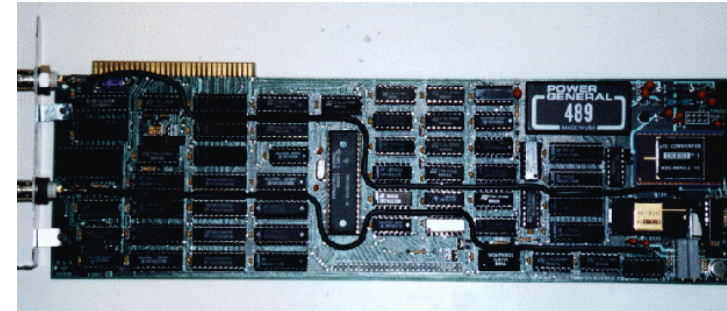


First PC plug-in board from Atlanta Signal Processors Inc.

Rockland Digital Filter, 1971



For the price of a small house, you could have one of these.

Digital Cell Phone

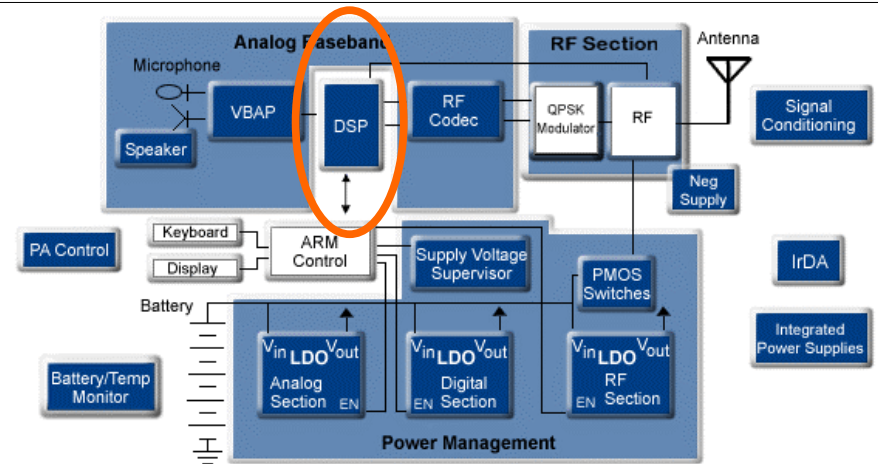

Free (?) with 2 year contract

DISCRETE-TIME SYSTEM



- OPERATE on $x[n]$ to get $y[n]$
- WANT a **GENERAL** CLASS of SYSTEMS
 - **ANALYZE** the SYSTEM
 - TOOLS: TIME-DOMAIN & FREQUENCY-DOMAIN
 - **SYNTHESIZE** the SYSTEM


D-T SYSTEM EXAMPLES



- EXAMPLES:
 - POINTWISE OPERATORS
 - SQUARING: $y[n] = (x[n])^2$
 - RUNNING AVERAGE
 - **RULE**: "the output at time n is the average of three consecutive input values"

DISCRETE-TIME SIGNAL

- $x[n]$ is a LIST of NUMBERS
 - INDEXED by "n"

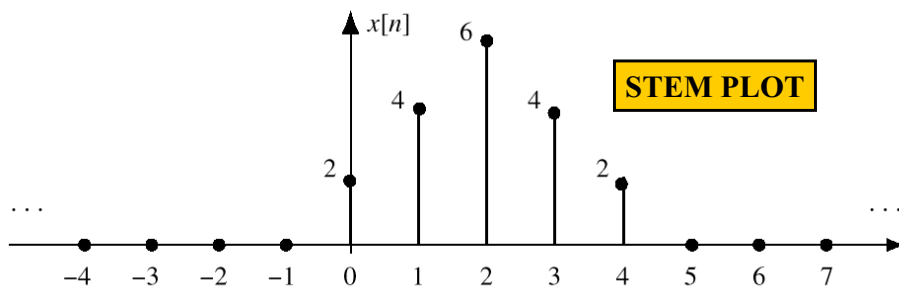

3-PT AVERAGE SYSTEM

- ADD 3 CONSECUTIVE NUMBERS
 - Do this for each "n"

the following input-output equation

Make a TABLE

$$y[n] = \frac{1}{3}(x[n] + x[n + 1] + x[n + 2])$$

n	$n < -2$	-2	-1	0	1	2	3	4	5	$n > 5$
$x[n]$	0	0	0	2	4	6	4	2	0	0
$y[n]$	0	$\frac{2}{3}$	2	4	$\frac{14}{3}$	4	2	$\frac{2}{3}$	0	0

n=0 $y[0] = \frac{1}{3}(x[0] + x[1] + x[2])$

n=1 $y[1] = \frac{1}{3}(x[1] + x[2] + x[3])$

INPUT SIGNAL

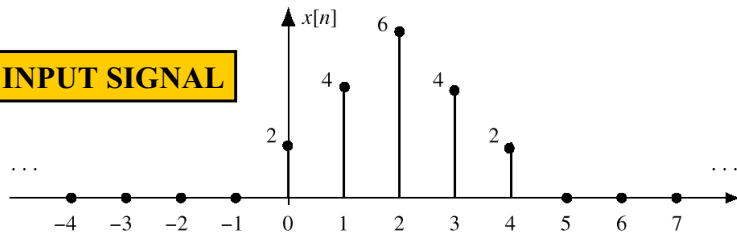


Figure 5.2 Finite-length input signal, $x[n]$.

$$y[n] = \frac{1}{3}(x[n] + x[n + 1] + x[n + 2])$$

OUTPUT SIGNAL

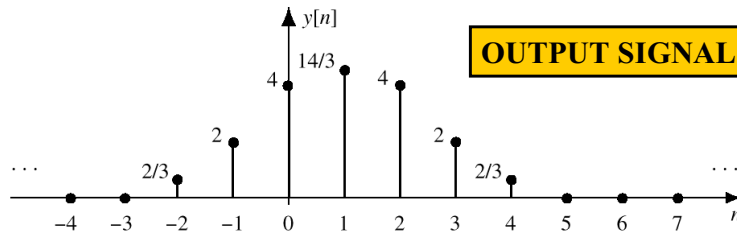


Figure 5.3 Output of running average, $y[n]$.

PAST, PRESENT, FUTURE

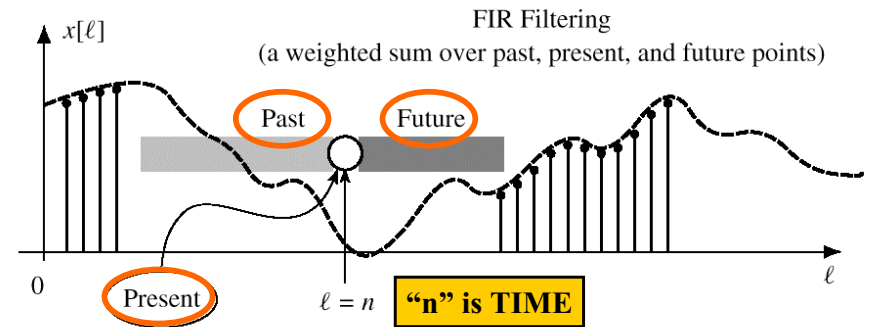


Figure 5.4 The running-average filter calculation at time index n uses values within a sliding window (shaded). Dark shading indicates the future ($\ell > n$); light shading, the past ($\ell < n$).

ANOTHER 3-pt AVERAGER

- Uses "PAST" VALUES of $x[n]$
- IMPORTANT IF "n" represents REAL TIME
- WHEN $x[n]$ & $y[n]$ ARE STREAMS

$$y[n] = \frac{1}{3}(x[n] + x[n - 1] + x[n - 2])$$

n	$n < -2$	-2	-1	0	1	2	3	4	5	6	7	$n > 7$
$x[n]$	0	0	0	2	4	6	4	2	0	0	0	0
$y[n]$	0	0	0	$\frac{2}{3}$	2	4	$\frac{14}{3}$	4	2	$\frac{2}{3}$	0	0

GENERAL FIR FILTER

- FILTER COEFFICIENTS $\{b_k\}$

- DEFINE THE FILTER

$$y[n] = \sum_{k=0}^M b_k x[n - k]$$

- For example, $\{b_k\} = \{3, -1, 2, 1\}$

$$y[n] = \sum_{k=0}^3 b_k x[n - k]$$

$$= 3x[n] - x[n - 1] + 2x[n - 2] + x[n - 3]$$

GENERAL FIR FILTER

- FILTER COEFFICIENTS $\{b_k\}$


$$y[n] = \sum_{k=0}^M b_k x[n - k]$$

- FILTER ORDER is M
- FILTER LENGTH is $L = M + 1$
 - NUMBER of FILTER COEFFS is L

GENERAL FIR FILTER

- SLIDE a WINDOW across $x[n]$

$$y[n] = \sum_{k=0}^M b_k x[n - k]$$

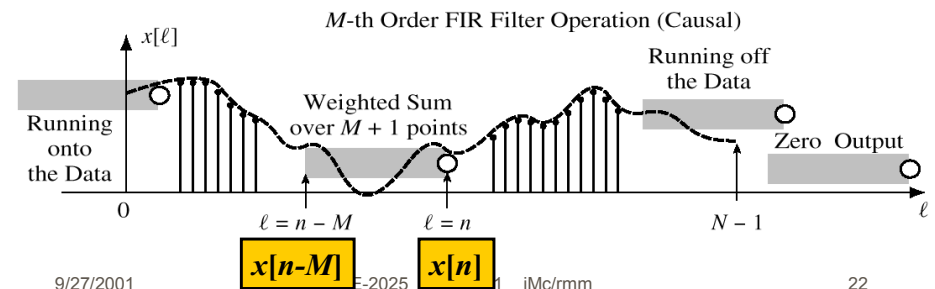

FILTERED STOCK SIGNAL




SPECIAL INPUT SIGNALS

- $x[n] = \text{SINUSOID}$ **FREQUENCY RESPONSE**
- $x[n]$ has only one NON-ZERO VALUE

$$\delta[n] = \begin{cases} 1 & n = 0 \\ 0 & n \neq 0 \end{cases}$$

UNIT-IMPULSE

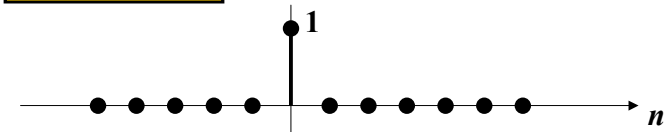

UNIT IMPULSE SIGNAL $\delta[n]$

n	...	-2	-1	0	1	2	3	4	5	6	...
$\delta[n]$	0	0	0	1	0	0	0	0	0	0	0
$\delta[n-3]$	0	0	0	0	0	0	1	0	0	0	0

$\delta[n]$ is NON-ZERO
When its argument
is equal to ZERO


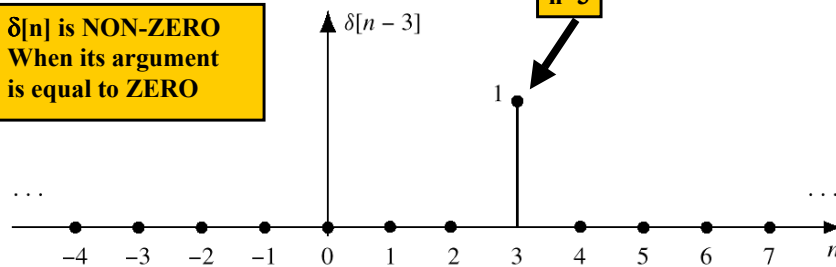


Figure 5.7 Shifted impulse sequence, $\delta[n-3]$.

MATH FORMULA for $x[n]$

Use **SHIFTED** IMPULSES to write $x[n]$

$$x[n] = 2\delta[n] + 4\delta[n-1] + 6\delta[n-2] + 4\delta[n-3] + 2\delta[n-4]$$

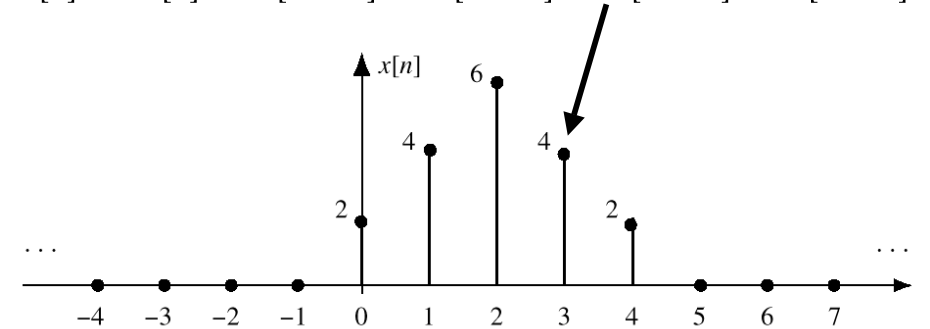


4-pt AVERAGER

- CAUSAL SYSTEM: USE PAST VALUES
 - $y[n] = (x[n]+x[n-1]+x[n-2]+x[n-3])/4$
- INPUT = UNIT IMPULSE SIGNAL = $\delta[n]$
 - $x[n] = \delta[n]$
 - $y[n] = 0.25\delta[n] + 0.25\delta[n-1] + 0.25\delta[n-2] + 0.25\delta[n-3]$
- OUTPUT is called "IMPULSE RESPONSE"
 - $h[n] = \{\dots, 0, 0, 0.25, 0.25, 0.25, 0.25, 0, 0, \dots\}$

4-pt Avg Impulse Response

- $y[n] = (x[n]+x[n-1]+x[n-2]+x[n-3])/4$
- $\delta[n]$ "READS OUT" the FILTER COEFFICIENTS
- $h[n] = \{\dots, 0, 0, 0.25, 0.25, 0.25, 0.25, 0, 0, \dots\}$

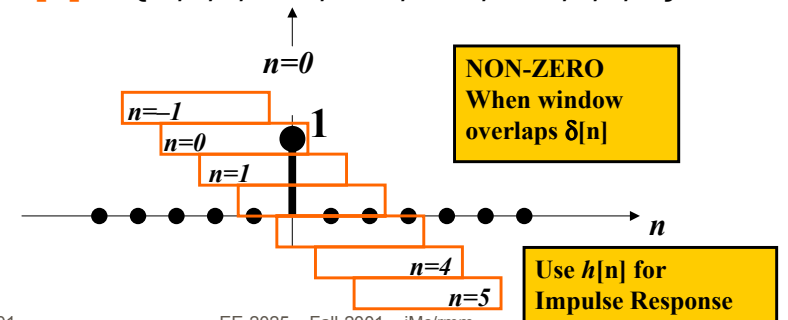

FIR IMPULSE RESPONSE

■ Convolution = Filter Definition

■ Filter Coeffs = Impulse Response

n	$n < 0$	0	1	2	3	...	M	$M + 1$	$n > M + 1$
$x[n] = \delta[n]$	0	1	0	0	0	0	0	0	0
$y[n] = h[n]$	0	b_0	b_1	b_2	b_3	...	b_M	0	0

$$y[n] = \sum_{k=0}^M b_k x[n-k]$$

$$y[n] = \sum_{k=0}^M h[k] x[n-k]$$

CONVOLUTION

FILTERING EXAMPLE

■ 7-point AVERAGER $y_7[n] = \frac{1}{7} \left(\sum_{k=0}^6 x[n-k] \right)$

■ Removes cosine

■ By making its amplitude (A) smaller


■ 3-point AVERAGER

■ Changes A slightly

$$y_3[n] = \frac{1}{3} \left(\sum_{k=0}^2 x[n-k] \right)$$


3-pt AVG EXAMPLE

Input Signal: $x[n] = (1.02)^n + \cos(2\pi n/8 + \pi/4)$ for $0 \leq n \leq 40$

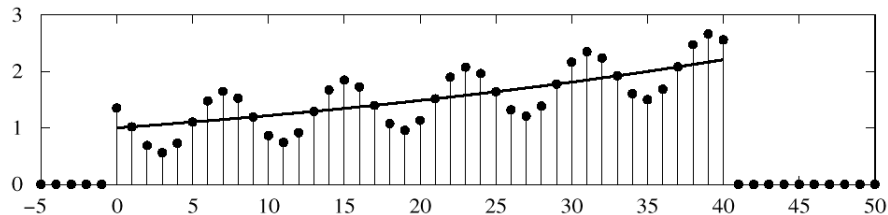


USE PAST VALUES

Output of 3-Point Running-Average Filter

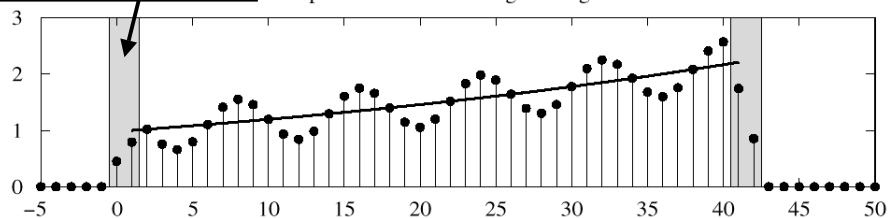


7-pt FIR EXAMPLE (AVG)

Input Signal: $x[n] = (1.02)^n + \cos(2\pi n/8 + \pi/4)$ for $0 \leq n \leq 40$

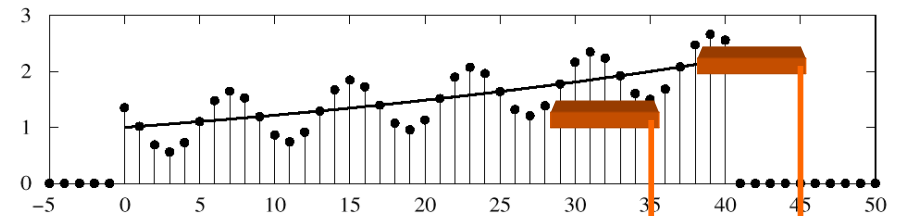

CAUSAL: Use Previous

Output of 7-Point Running-Average Filter

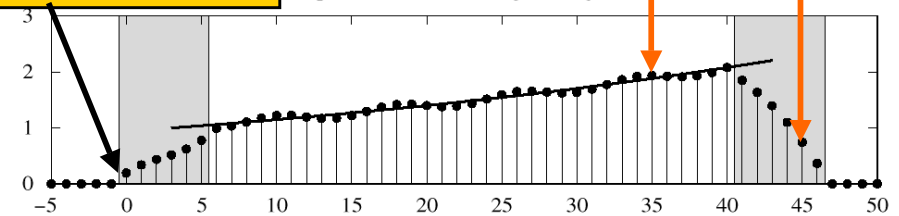

LONGER OUTPUT