

PROBLEM s-06-Q.1.1:

The sum of two sinusoids is another sinusoid:

$$A \cos(\omega t + \varphi) = 200 \cos\left(\frac{1}{3}\pi(t + 13)\right) + 300 \cos\left(\frac{1}{3}\pi t - 5\pi/6\right)$$

- (a) Determine the the numerical values of A and φ , as well as ω (give the correct units).


$A =$ _____

$\varphi =$ _____


$\omega =$ _____

- (b) Make two complex plane plots to illustrate how complex amplitudes (phasors) were combined to solve part (a). On the first plot, show a vector plot of the two complex amplitudes whose values are given by the sinusoids on the **right** hand side of the equal sign; on the second plot, show a “head-to-tail” vector plot of those same two complex amplitudes plus the resultant vector that gives the solution. *Use an appropriate scale on the grids below.*

Two vectors here.

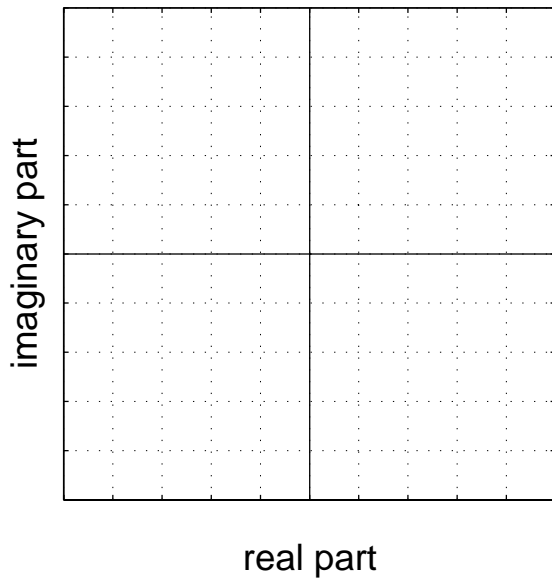

Head-to-tail plot here.

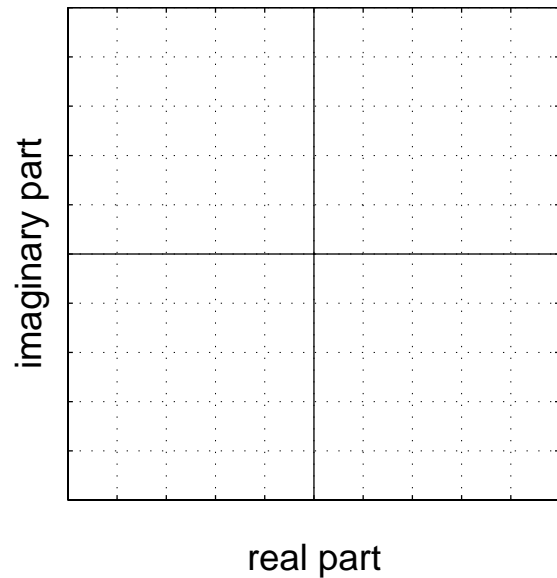

PROBLEM s-06-Q.1.2:

The signal $x(t)$ is defined by complex exponentials and complex amplitudes:

$$x(t) = 50e^{j\pi/3}e^{j7t} + 50e^{-j\pi/3}e^{-j7t} + 77e^{-j\pi}$$

(a) Write the formula for $x(t)$ as a sum of real-valued sinusoids.

(b) Define a new signal $y(t)$ to be the derivative of $x(t)$, i.e., $y(t) = \frac{dx(t)}{dt}$.

Make a (well-labeled) sketch of the spectrum of the signal $y(t)$. Simplify the numerical values for the complex amplitudes, so that the values of magnitude and phase are obvious.

PROBLEM s-06-Q.1.3:

Two questions about sinusoids, $A \cos(\omega t + \varphi)$.

(a) The following MATLAB code makes a plot of a sinusoid:

```
tt = 0:0.0001:1;  
znum = exp(j*8*pi*tt) - j*exp(j*8*pi*tt);  
zden = 3*j*exp(-j*8*pi*tt) + 4*j*exp(-j*8*pi*tt);  
xx = real(znum./zden);  
plot(tt,xx), grid on, shg
```


Determine the mathematical formula by giving numerical values for A , φ , and ω (in rad/s).

$A =$ _____

$\varphi =$ _____

$\omega =$ _____

(b) For the sinusoid plotted below, determine its amplitude, phase, and frequency (in rad/s).

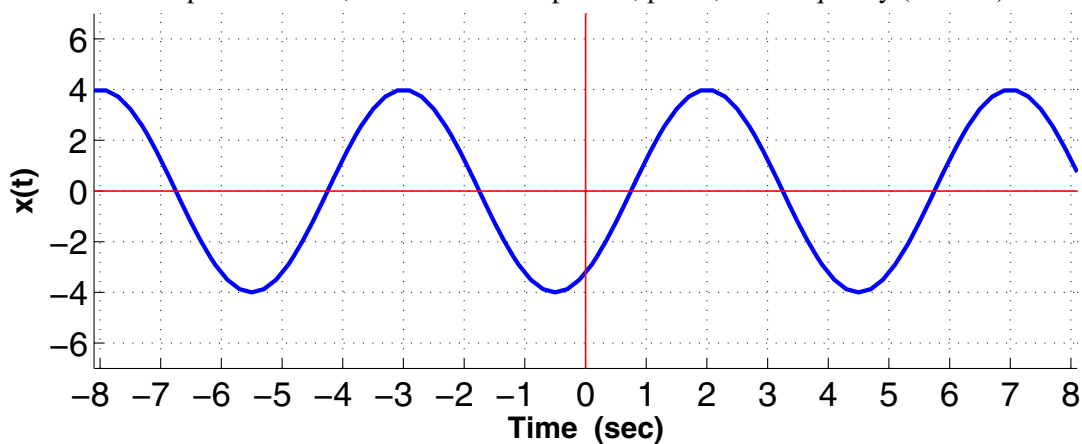


$A =$ _____

$\varphi =$ _____

$\omega =$ _____

PROBLEM s-06-Q.1.4:

Suppose that a periodic signal $x(t)$ is defined by the plot below (only the section $-8 \leq t \leq 8$ is shown):

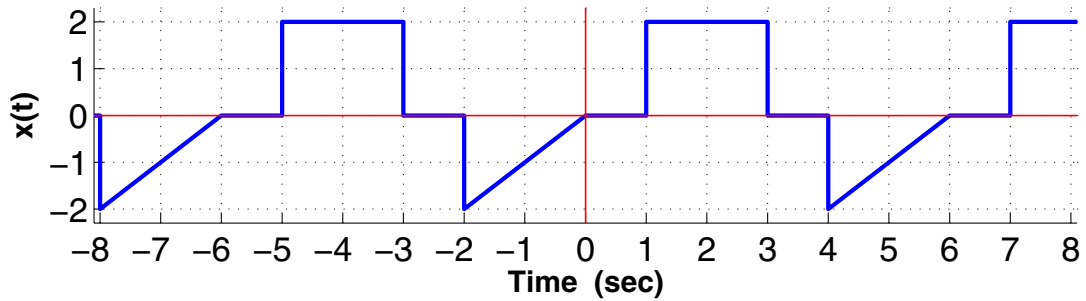

- (a) Determine the fundamental frequency of $x(t)$ in Hz.
- (b) Determine the DC value of $x(t)$.
- (c) Write the Fourier integral expression for the coefficient a_6 in terms of the specific signal $x(t)$ defined above. *Set up all the specifics of the integral (e.g., limits of integration), but do not evaluate the integral. All parameters in the integral(s) should have numeric values. NOTE: more than one integral might be needed.*

PROBLEM s-06-Q.1.5:

For the FM signal $x(t)$ defined as:

$$x(t) = \Re \{ \exp\{jC e^{\lambda t}\} \}$$

we will denote its instantaneous frequency (in Hz) as $f_x(t)$.

- (a) For $C = -150\pi$ and $\lambda = -0.5$, make a *carefully labeled* plot of the instantaneous frequency $f_x(t)$ over the time interval $0 \leq t \leq 2$ secs. *Note: the frequency should be in hertz (Hz).*

- (b) Evaluate $\int_{-2}^2 |7j \exp\{j\pi e^{-0.5t}\}|^2 dt$. Since the integral is a definite integral, give a numerical answer.