

PROBLEM SPR-11-Q.1.1:

Evaluate the expressions below, where angles are given in radians and frequencies in rad/s. Give **numerical answers**; the magnitudes, r , or amplitudes, A , **must be nonnegative**; the angles, θ or φ , **must be in radians**, and lie between $-\pi$ and $+\pi$. Use a calculator; only the answers will be graded—no explanations necessary.

(a) Determine r and θ , such that $re^{j\theta} = -45j$.

$r =$	$\theta =$
-------	------------

(b) Determine r and θ , such that $re^{j\theta} = (-100 - j150)e^{-j3}$.

$r =$	$\theta =$
-------	------------

(c) Determine r and θ , such that $re^{j\theta} = \frac{7}{-1 + j2}$.

$r =$	$\theta =$
-------	------------

(d) Determine r and θ , such that $re^{j\theta} = 99e^{-j3} + 41e^{j2}$.

$r =$	$\theta =$
-------	------------

(e) Express this signal, $\Re\{1.4e^{-j1.8}e^{j3\pi t}\}$, as a sinusoid, i.e., $A\cos(\omega_0 t + \varphi)$.

$A =$	$\varphi =$
-------	-------------

(f) Express this signal, $\Re\{\frac{d}{dt}e^{j3t}\}$, as a sinusoid, i.e., $A\cos(\omega_0 t + \varphi)$.

$A =$	$\varphi =$
-------	-------------

(g) Express this signal, $\Re\{(-1.2 - j2.1)e^{j5t}\}$, as a sinusoid, i.e., $A\cos(\omega_0 t + \varphi)$.

$A =$	$\varphi =$
-------	-------------

(h) Express this signal, $37\cos(19t - 2.1) + 29\cos(19t - 2.9)$, as a sinusoid, i.e., $A\cos(\omega_0 t + \varphi)$.

$A =$	$\varphi =$	$\omega_0 =$
-------	-------------	--------------


PROBLEM SPR-11-Q.1.2:

- (a) Evaluate this definite integral, and express the answer in polar form: $\int_1^{3.5} e^{j\pi t} dt = r e^{j\theta}$
- $r =$ $\theta =$

- (b) Find a complex-valued signal $z_1(t) = (A e^{j\varphi}) e^{j\omega t}$ such that $\Re\{\frac{d}{dt} z_1(t)\} = 40 \cos(5\pi(t + 0.02))$.
- $A =$ $\varphi =$ $\omega =$

- (c) Values of the sinusoid shown below can be generated via the following MATLAB statements:

```
tt = -8:0.01:8; XX = ??; ww = ??; xt = real( XX * exp(j*ww*tt) );
```

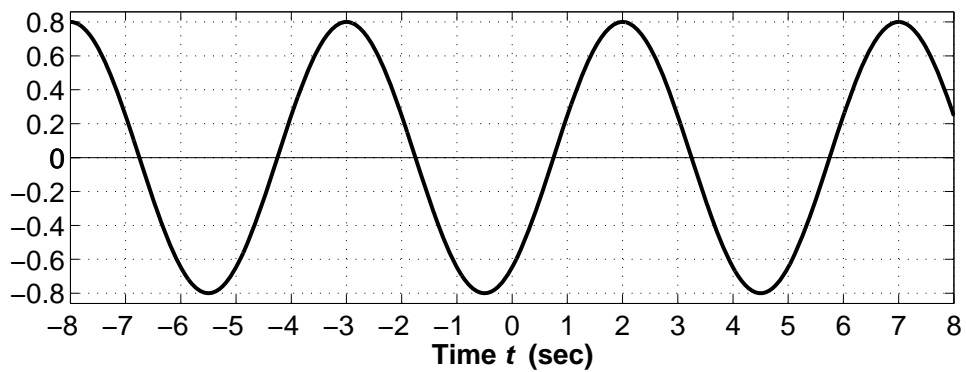


Write the appropriate MATLAB statements needed to define XX and ww .

XX= _____

ww= _____

PROBLEM SPR-11-Q.1.3:

- (a) For the following sum: $\sum_{k=0}^3 e^{j2\pi(k-0.5)/8}$ make a plot of the individual vectors that represent the complex exponentials being added together. Label each vector with the corresponding value of the index k . It is not necessary to actually find the sum.

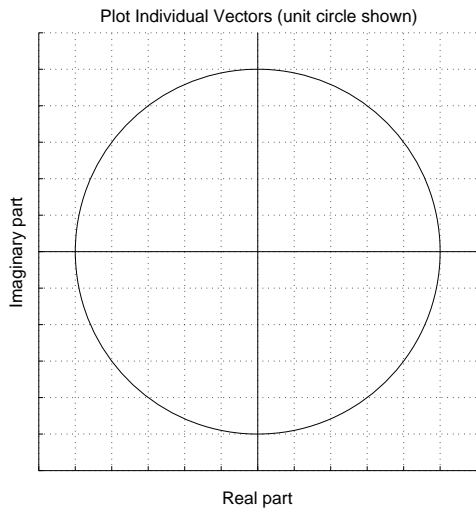

- (b) Recall that adding N consecutive complex exponentials whose phases differ by $2\pi/N$ will give a sum equal to zero, e.g., $\sum_{k=1}^N e^{j2\pi k/N} = 0$. The MATLAB code below adds many sinusoids whose phases differ by $2\pi/N$. The plot made from the vector `xx` is a single sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

```
tt = 0:0.001:5;
xx = 0*tt;
for kk=2:32
    xx = xx + 300*cos(3*pi*tt + kk*pi/3);
end
plot(tt,xx), title('SECTION of a SINUSOID'), xlabel('TIME (sec)')
```

Determine the parameters for the sinusoid in the vector `xx`. Also, identify the value of N , as well as the number of sinusoids being added, N_s .

$N_s =$	$N =$	$A =$	$\varphi =$	$\omega_0 =$
---------	-------	-------	-------------	--------------

PROBLEM SPR-11-Q.1.1:

Evaluate the expressions below, where angles are given in radians and frequencies in rad/s. Give *numerical answers*; the magnitudes, r , or amplitudes, A , *must be nonnegative*; the angles, θ or φ , *must be in radians*, and lie between $-\pi$ and $+\pi$. Use a calculator; only the answers will be graded—no explanations necessary.

(a) Determine r and θ , such that $re^{j\theta} = -45j$.

$r = 45$ $\theta = -\pi/2$ rads

(b) Determine r and θ , such that $re^{j\theta} = (-100 - j150)e^{-j3}$.

$r = 180.3$ $\theta = 1.124$ rads

(c) Determine r and θ , such that $re^{j\theta} = \frac{7}{-1 + j2}$.

$r = 3.13$ $\theta = -2.034$ rads

(d) Determine r and θ , such that $re^{j\theta} = 99e^{-j3} + 41e^{j2}$.

$r = 117.4$ $\theta = 2.942$ rads

(e) Express this signal, $\Re\{1.4e^{-j1.8}e^{j3\pi t}\}$, as a sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

$A = 1.4$ $\varphi = -1.8$ rads

(f) Express this signal, $\Re\{\frac{d}{dt}e^{j3t}\}$, as a sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

$A = 3$ $\varphi = \pi/2$ rads

(g) Express this signal, $\Re\{(-1.2 - j2.1)e^{j5t}\}$, as a sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

$A = 2.419$ $\varphi = -2.090$ rads

(h) Express this signal, $37 \cos(19t - 2.1) + 29 \cos(19t - 2.9)$, as a sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

$A = 60.87$ $\varphi = -2.449$ rads $\omega_0 = 19$ rad/s

PROBLEM SPR-11-Q.1.2:

- (a) Evaluate this definite integral, and express the answer in polar form: $\int_1^{3.5} e^{j\pi t} dt = r e^{j\theta}$
- $$r e^{j\theta} = \frac{\sqrt{2}}{\pi} e^{-j3\pi/4} = 0.4502 e^{-j2.3562}$$


Approach: The integral of an exponential is an exponential, but you end up with a j in the denominator because the exponent contains a j . After evaluating at the limits of the definite integral, the numerator has a complex number. Finally, convert the complex numerator-denominator into polar form with a calculator.

- (b) Find a complex-valued signal $z_1(t) = (Ae^{j\varphi})e^{j\omega t}$ such that $\Re\{\frac{d}{dt}z_1(t)\} = 40\cos(5\pi(t + 0.02))$.
- $$z_1(t) = (Ae^{j\varphi})e^{j\omega t} = 2.546; e^{-j0.4\pi} e^{j5\pi t}$$

Approach: The derivative of $z_1(t)$ is the exponential multiplied by $j\omega$. Thus, we must match $(j\omega Ae^{j\varphi})e^{j\omega t} = (\omega A)e^{j(\varphi+\pi/2)}e^{j\omega t}$ with the parameters of the sinusoid. The amplitude is $A = 40/5\pi = 2.546$, and the phase $\varphi = 5\pi(+0.02) - \frac{1}{2}\pi = -0.4\pi$ rads.

- (c) Values of the sinusoid shown below can be generated via the following MATLAB statements:

```
tt = -8:0.01:8; XX = ??; ww = ??; xt = real( XX * exp(j*ww*tt) );
```

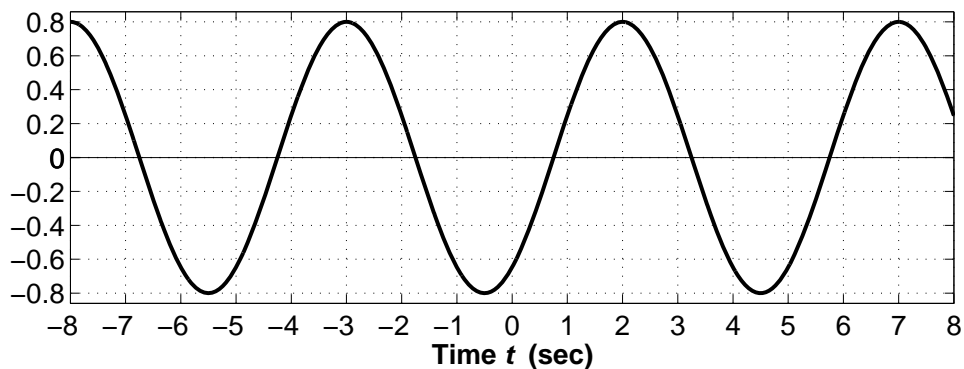

Write the appropriate MATLAB statements needed to define XX and ww.


```
XX = 0.8*exp(-j*4*pi/5)
```

```
ww = 2*pi/5
```

Approach: Measure the period to obtain $T = 5$ s, and measure the location of a positive peak, $t_m = +2$ s. Measure the amplitude, A , from the height of a positive peak. Calculate the frequency (in rad/s) via $\omega = 2\pi/T = 2\pi/5$, and then the phase (in rads) via $\varphi = -\omega t_m = -2\pi(+2)/5$. Finally, use A and φ to define XX from the complex amplitude $Ae^{j\varphi}$.

PROBLEM SPR-11-Q.1.3:

- (a) For the following sum: $\sum_{k=0}^3 e^{j2\pi(k-0.5)/8}$ make a plot of the individual vectors that represent the complex exponentials being added together. Label each vector with the corresponding value of the index k . It is not necessary to actually find the sum.

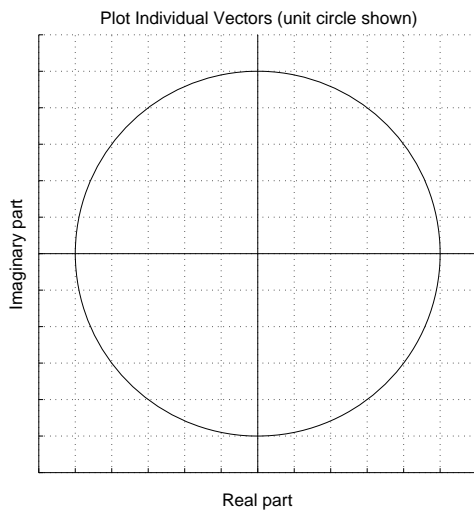

Approach: The length of all vectors is one. The exponents are angles. Convert from radians to degrees to make the plotting easy.

The four vectors are at angles:

$$2\pi(-0.5)/8 = -\pi/8 = -22.5^\circ,$$

$$2\pi(0.5)/8 = +\pi/8 = 22.5^\circ,$$

$$2\pi(1.5)/8 = 3\pi/8 = 67.5^\circ,$$

$$2\pi(2.5)/8 = 5\pi/8 = 112.5^\circ.$$

- (b) Recall that adding N consecutive complex exponentials whose phases differ by $2\pi/N$ will give a sum equal to zero, e.g., $\sum_{k=1}^N e^{j2\pi k/N} = 0$. The MATLAB code below adds many sinusoids whose phases differ by $2\pi/N$. The plot made from the vector `xx` is a single sinusoid, i.e., $A \cos(\omega_0 t + \varphi)$.

```
tt = 0:0.001:5;
xx = 0*tt;
for kk=2:32
    xx = xx + 300*cos(3*pi*tt + kk*pi/3);
end
plot(tt,xx), title('SECTION of a SINUSOID'), xlabel('TIME (sec)')
```

Determine the parameters for the sinusoid in the vector `xx`. Also, identify the value of N , as well as the number of sinusoids being added, N_s .

$$N_s = 31$$

$$N = 6$$

$$A = 300$$

$$\varphi = 2\pi/3 \text{ rads}$$

$$\omega_0 = 3\pi \text{ rad/s}$$

Approach: The `for` loop adds 31 sinusoids, which can be done as the phasor addition of 31 complex amplitudes. The phases of the sinusoids are $2\pi k/6$, i.e., the angular difference between successive complex amplitudes is $2\pi/6$. The identity tells us that adding 6 successive complex exponentials will give zero, and we are adding 5 groups of 6, but we have one left over. That “left over” one is the complex amplitude of the answer; you can choose the first one, or the last one. Since the range of k is `2:32`, the first one is at $k = 3$, so it is $300e^{j2\pi(3)/6}$ which will be the complex amplitude $Ae^{j\varphi}$, giving A and φ for the surviving sinusoid.